

GLASS HINGE (INSET)



GS-GH20




- For inset glass doors
- Can be used together with glass bracket GS-GB20 and lock GS-GL20 for a total design of your showcase.
- Temporary holding feature allows the door to be installed easily by one person.
- Sideways adjustment ($\pm 2.5\text{mm}$) possible after installation of the door.

Remarks


- Glass door weight is preferred to door size.
- Please use different gaskets supplied with item for 6mm thickness glass door.
- Film on glass door is recommended for safe usage.
- Prepare door stopper separately.

Parts supplied with set

- Gasket (For 6mm thickness glass door)
- Spanner Hex.3

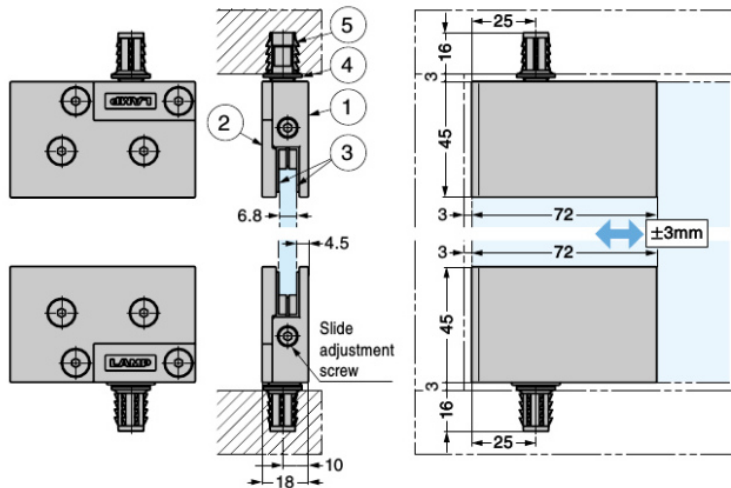

Installation Drawings

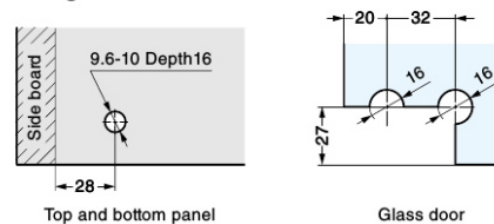

No.	Part Name	Material	Finish/Colour
①	Body	Zinc Alloy (ZDC)	Chrome, Gold (24K) Plated,
②	Back Plate		Black
③	Gasket	Chloroprene Rubber (CR)	Black
④	Axis	Stainless Steel	Plain
⑤	Insert	Zinc Alloy (ZDC)	-

Sold in set (2 pcs).

RoHS	CAD	Item Code	Item Name	Finish	Door Width	Door Height	Glass Thickness	Door Weight (N/set)	Door Weight (kgf/set)
-	2D3D	170-041-445	GS-GH20-CR	Chrome	Max. 700mm	Max. 1,600mm	6, 8mm	196	20
-	2D3D	170-041-446	GS-GH20-GP	Gold (24K) Plated					
-	2D3D	170-041-447	GS-GH20-BL	Black					