


3-WAY ADJUSTABLE CONCEALED HINGE



HES3D-160

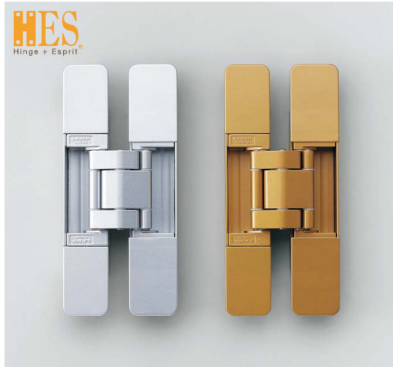

Features

- 3-WAY adjustment function allows vertical, horizontal, and depth adjustment after hinge installed.
- Easy installation : Temporary door holding feature.
- Successfully passed for the 300,000 open/close private cycle test.
- Cover hides all screw heads for clean appearance.
- Door weight : Max. 45 kg /2 pcs, 60 kg /3 pcs
- Door thickness : Min. 35 mm
- Door width : Max. 900 mm
- Door height : 2400 mm recommended. Taller doors are possible if the weight is within specification.

Remarks


- Recommend to use with bellow door closer/ damper as bellow.
 - LAPCON DOOR DAMPER LDD-S (P.720-721)
 - LAPCON DOOR DAMPER LDD-V (P.718)
 - LAPCON DOOR DAMPER LDC-N2 (P.722-724)
- ※ For using stopper function of LDC, please install door holder separately at the stop position.

Parts Included

- Countersunk head wood screw 4.8x25
- Hex. wrench (a nominal diameter 4)

Sold Separately

Installation template HES3D-160-TMP (P.474)

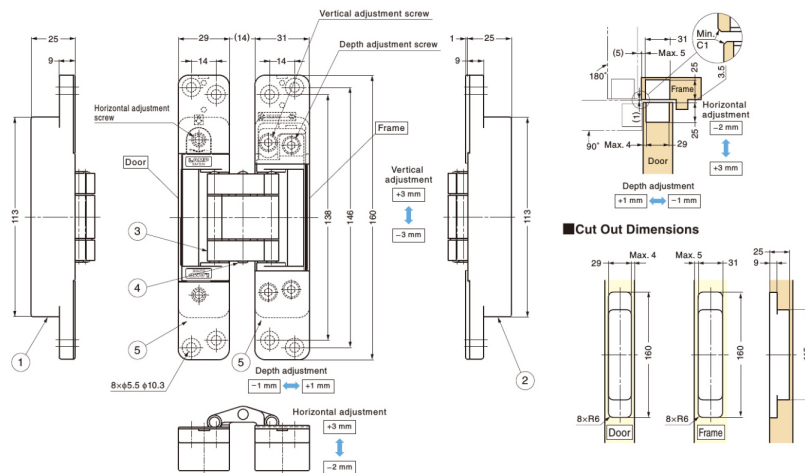

No.	Part Name	Material	Finish	
			SL	GL
①	Body	Zinc Alloy (ZDC)	Silver	Gold
②	Base Frame	Zinc Alloy (ZDC)	Silver	Gold
③	Arm	Zinc Alloy (ZDC)	Silver	Gold
④	Shaft	Stainless Steel	-	-
⑤	Cover (2 pairs)	ABS	Paint/Silver	Paint/Gold



Item Code	Item Name	Colour	Door Width	Door Height	Door Thickness	Door Weight		Opening Angle	Weight	Box	Carton
170-091-009	HES3D-160SL	Silver	Max. 900	Max. 2400	Min. 35	Max. 45 kg/2 pcs	Max. 60 kg/3 pcs	180°	756 g	2 pcs	12 pcs
170-091-010	HES3D-160GL	Gold	Max. 900	Max. 2400	Min. 35	Max. 45 kg/2 pcs	Max. 60 kg/3 pcs	180°	756 g	2 pcs	12 pcs